


Field Test Device

Qualify and validate your network.

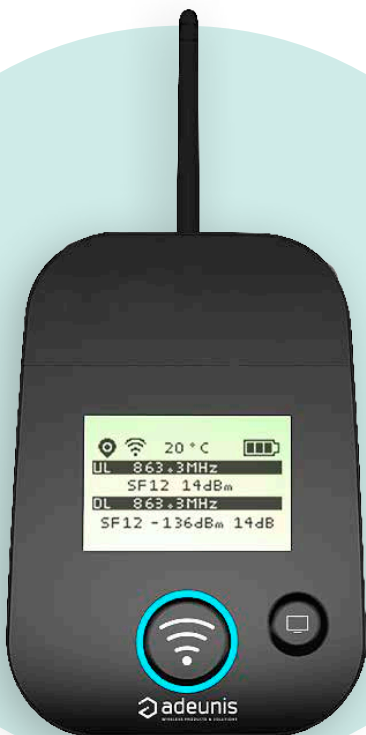

TEST

- Ensure the good positioning of your objects



MEASURE

- Check your network's coverage
- Choose the most appropriate network




BENEFITS

- Immediate viewing of network coverage data
- Geolocation of measuring points
- A benchmark product widely praised by public network operators



PRODUCT USES

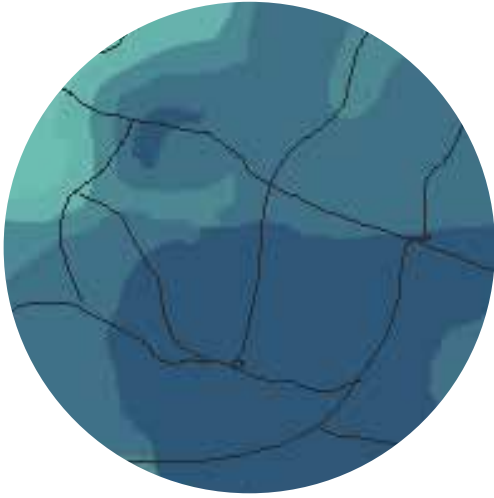

Check the availability of a operated network for its objects.



Test the feasibility of a tracking project.

TECHNICAL SPECIFICATIONS

- Viewable data: UL/DL - Channels - RSSI/SNR/ PER - GPS - Temperature
 - Self-powered and rechargeable
 - Dimensions: 180 x 72 x 21 mm
 - Zone: Sigfox: RC1 / LoRaWAN: EU863-870
- Operating temperature range: -25° C to +70° C
- Weight: 140g
- Standards: Directive 2014/53/EU (RED)
 - Radiated RF power: 14 dBm
- Sensitivity: -126dBm SIGFOX / -140dBm LoRa

